

STAINLESS STEEL

(for 940E Series Electric Motor Control Valve)


Valve Body Selection

Single Seat • 1/2" – 2"

All dimensions are nominal. Dimensions in [] are in millimeters.



Stem In-To-Close

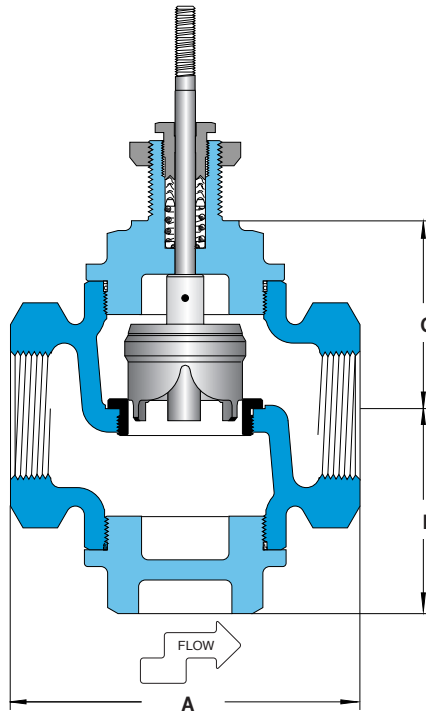

CONTROL VALVES

Specifications

Body Material	Trim Material	Trim Style	Connection	Pressure & Temperature Rating
Stainless steel	Stainless steel	Equal percentage	Threaded	515 PSI @ 400°F (204°C)

Valve Body Selection

In-To-Close											
Valve Body Number	Size		C _v	Maximum Close-Off Pressure (psid)				Dimensions			Approximate Shipping Weight
	Connection (NPT)	Nominal Port		Actuator Size 25		Actuator Size 26		A	B	C	
				Class III	Class IV	Class III	Class IV				
M14	1/2	1/2"	4.9	400	400	x	x	5.0 [127]	2.8 [71]	2.8 [71]	8 lbs [3.6 kg]
M19	3/4	3/4"	7.2	400	400	x	x	5.0 [127]	2.8 [71]	2.8 [71]	8 lbs [3.6 kg]
M26	1	1"	10.0	283	247	395	360	5.0 [127]	2.8 [71]	2.8 [71]	8 lbs [3.6 kg]
M47	1 1/2	1 1/2"	24	120	96	171	147	6.1 [155]	3.4 [86]	3.5 [89]	16 lbs [7.3 kg]
M58	2	2"	40	70	52	102	83	6.5 [165]	3.8 [97]	3.8 [97]	19 lbs [8.6 kg]