Thermal System Selection

Remote Mounted Dial Thermometers

U = Insertion Length X = Bulb Length

Bulb & Capillary Style	Order Code	Connection Style & Material	Bulb Material	Capillary Tubing Material	Minimum Bulb Insertion Length for Capillary Length (in feet) shown			
					Va up to 10	por Actuate 15-50	ed over 50	Liquid Act. All Lengths
Union Connection	B01	Brass, 1/2 NPT	Vapor: Copper Liquid: Brass	Copper with Bronze Braided Armour	2"	33/4"	5 5/8"	2"
	B10	Stainless Steel, 1/2 NPT	Stainless Steel	Stainless Steel	2"	33/4"	55/8"	2"
Adjustable Union Connection	B02	Brass, 1/2 NPT	Vapor: Copper Liquid: Brass	Copper with Bronze Braided Armor	13/4"	31/2"	51/4"	13/4"
					Adjustable up to 24"			
	B04	B04 Stainless Steel, 1/2 NPT	Stainless Steel	Stainless Steel	13/4"	31/2"	51/4"	13/4"
					Adjustable up to 24"			1
Plain Bulb	B05	None	Vapor: Copper Liquid: Brass	Copper with Bronze Braided Armor	2"	33/4"	55/8"	2"
	B06	None	Stainless Steel	Stainless Steel	2"	33/4"	55/8"	2"
CONNECTING TUBING TUBING TUBING TUBING SEALED END 5/16"	B08	None	Vapor: Copper Liquid: Brass with Teflon Cover	Bronze Braided Armor with Teflon Cover	15"	15"	15"	23/4"
TEFLON COVER OVERALL BULB	B07	None	Stainless Steel with Teflon Cover	Stainless Steel with Teflon Cover	15"	15"	15"	23/4"
Averaging Bulb	B11*	Brass, 1/2 NPT	Copper	Copper with Bronze Braided Armor	N/A	N/A	N/A	Approx. 8 Feet
SPLIT NUT BULB	B12*	Stainless Steel, 1/2 NPT	Stainless Steel	Stainless Steel	N/A	N/A	N/A	Approx. 8 Feet




* B11 and B12 Averaging Bulbs are not available with vapor actuation.

Remote Mounted Dial Thermometers (cont'd)

Bulb & Capillary Style	Order Code	Connection Style & Material	Bulb Material	Capillary Tubing Material	Minimum Bulb Insertion Length for Capillary Length (in feet) shown			
					Va up to 10	por Actuate 15-50	d over 50	Liquid Act. All Lengths
Air Sensitive Bulb	B13	Steel Mounting Flange, Brass Fittings	Copper	Copper with Bronze Braided Armor	9"	9"	11"	8"
Union Connection with Spiral Armour	B15	Brass, 1/2 NPT	Vapor: Copper Liquid: Brass	Copper with Bronze Braid & SS Spiral Armor	2"	3 3/4"	5 5/8"	2"
	B16	Stainless Steel, ¹ /2 NPT	Stainless Steel	Stainless Steel with SS Spiral Armor	2"	3 3/4"	5 5/8"	2"

Direct Mounted Dial Thermometers

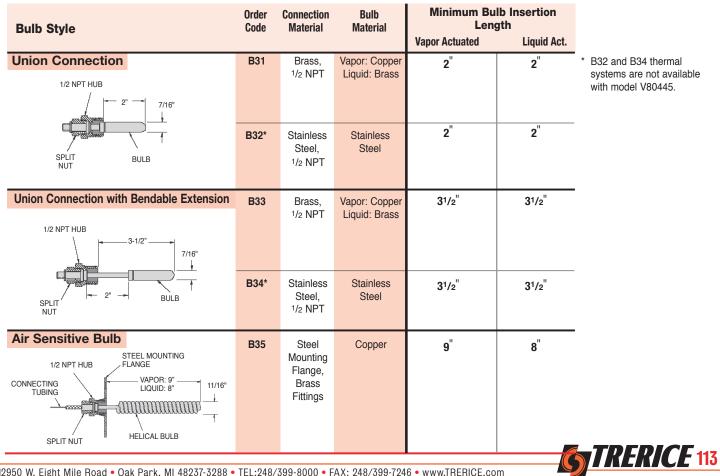

12950 W. Eight Mile Road • Oak Park, MI 48237-3288 • TEL:248/399-8000 • FAX: 248/399-7246 • www.TRERICE.com